

# **Compact Array**

## **AN3510**








#### **Features**

- Square chassis profile for close coupling
- Rigid aluminium cone
- · Half roll elastomer surround
- Weatherproof

### 8 Frequency Response

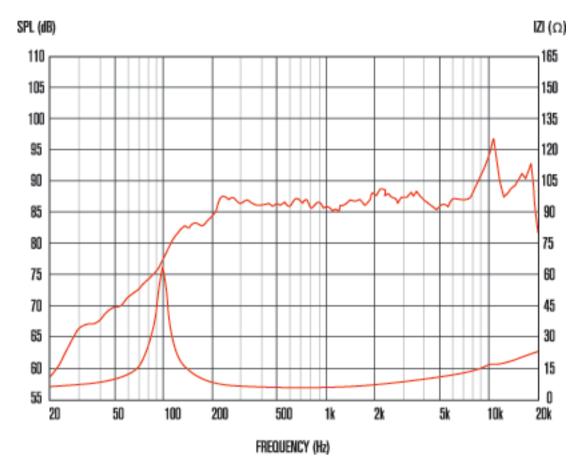

- Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.
- 2. Continuous Power Rating is defined as 3dB greater than the AES rating
- 3. Measured on axis at 1W, 1m in 2Î anechoic environment.
- 4. Xmax derived from: (voice coil winding width-gap depth)/2.
- 5. Small signal parameters measured after unit subjected to pre-conditioning signal

### **General Specifications**

Nominal diameter 88mm/3.5in Power rating <sup>1</sup> 35Wrms 70W Continuous power rating <sup>2</sup> Nominal impedance 8 Sensitivity 3 87dB Frequency range 98Hz-18,500kHz Voice coil diameter 25mm/1.0in Glass reinforced ABS Chassis type Magnet type Neodymium Voice coil material Round Copper Former material Polyimide Cone material **Aluminium** Surround material Elastomer Xmax 4 1.25mm/0.04in 4mm/0.16in Gap depth 6.5mm/0.23in Voice coil winding width

### **Small Signal Parameters**

Sd	38.48cm2/598in2
D	70mm/2.76in
Fs	113.4Hz
Mms	3.37g/0.13oz
Qms	5.093
Qes	0.740
Qts	0.646
Re	5.73
Vas	1.87l/0.07ft3
BI	4.56Tm
Cms	0.52mm/N

### **Mounting Information**

Overall depth 50mm/2in

Overall size 89.3 x 89.3mm/3.52in x 3.52in

Cut-out diameter 78.8mm/3.1in

Fitting 4 x M4 holes

Mounting PCD range 104mm/4.1in

Unit weight 160g/5.65oz

### **Packed Dimensions & Weight**

Single pack size W x D x H 115mm x 115mm x 70mm /4.5in x 4.5in x 2.8in Single pack weight 250g/0.6lb Multi pack size W x D x H 460mm x 635mm x 455mm /18.1in x 0.25in x 17.9in Multi pack weight 15kg/33lb



Celestion, Claydon Business Park, Great Blakenham, Ipswich, IP6 0NL United Kingdom