


CDX1-1010




- 2,200Hz recommended min. crossover freq (12dB/oct)
- Single piece PETP diaphragm and surround

8 Frequency Response

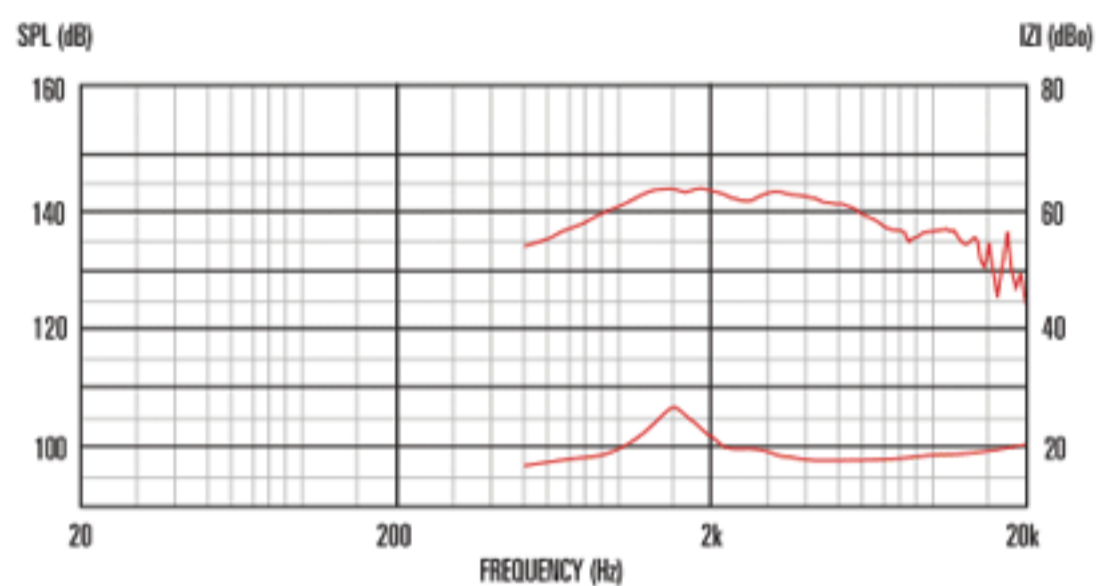

Measured - Plane Wave Tube

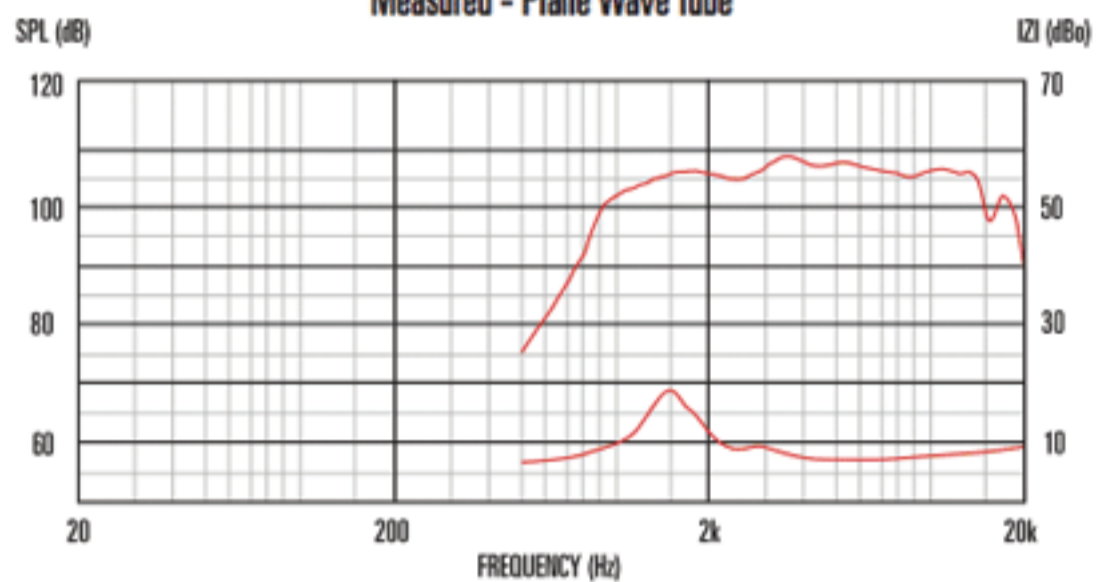

Measured - Exponential Horn 90° x 40° radiation pattern

1. Tested for two hours on plane wave tube using continuous band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.
2. Continuous Power Ratingg is defined as 3dB greater than the AES rating.
3. Measured on axis at 1W/1m, using typical horn, in 2Ĵ anechoic environment.

General Specifications

Power rating ¹	15Wrms
Continuous power rating ²	30W
Nominal impedance	8
Frequency range	1,500-20,000Hz
Sensitivity ³	107dB
Recommended min. crossover (12dB/oct)	2,200Hz
Voice coil diameter	25mm/1.0in
Voice coil material	Copper clad aluminium
Magnet type	Ferrite
Diaphragm material	PETP film
Surround material	PETP film

Mounting Information

Width	90mm/3.5in
Depth	52.8mm/2.1 in
Weight	0.8kg/1.8lb
Fitting	Screw (35mm/1.38in diameter)
Throat exit	25mm/1.0in

Packed Dimensions & Weight

Single pack size W x D x H	113mm x 103mm x 72mm /4.4in x 4in x 2,8in
Single pack weight	1.1kg/2.4lb
Multi pack size W x D x H	480mm x 480mm x 75mm /18.9in x 18.9in x 2.95in
Multi pack weight	15kg/33lb