


CDX1-1070




- 2,200 Hz recommended min. crossover freq (12dB/oct)
- Single piece PETP diaphragm and surround

8 Frequency Response

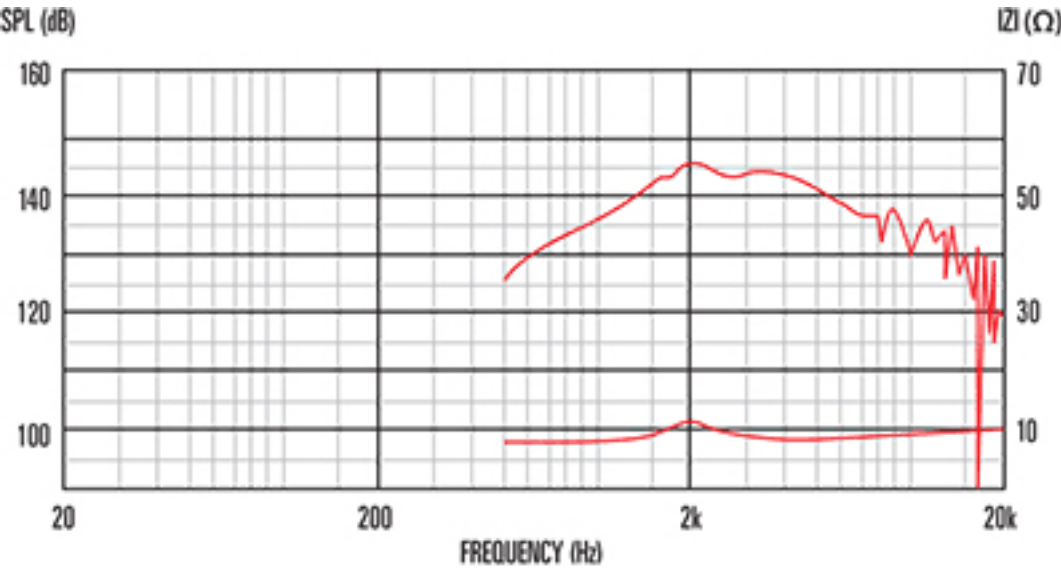

Measured - Plane Wave Tube

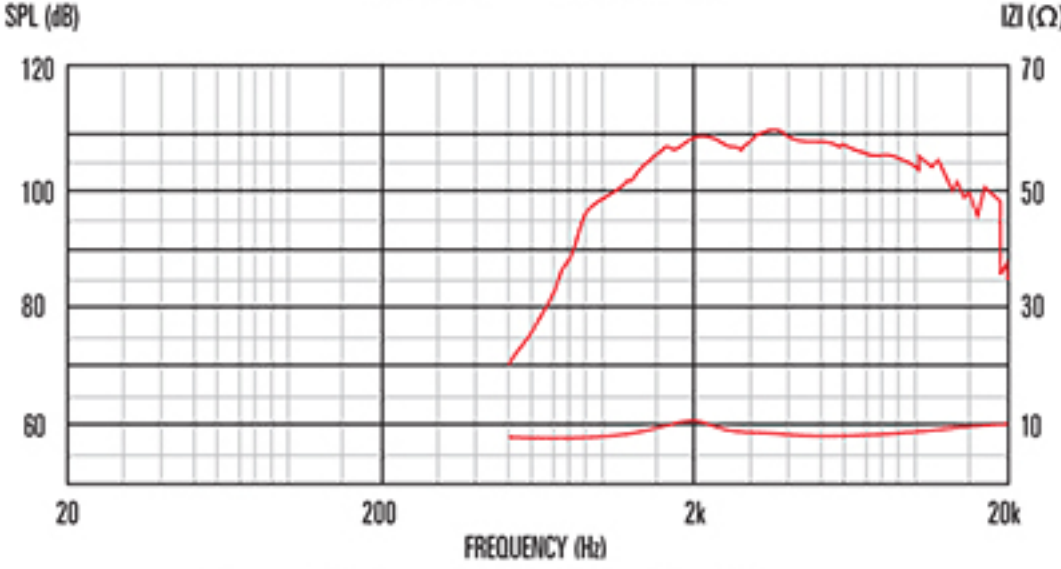

Measured - Exponential Horn 90° x 40° radiation pattern

1. Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.
2. Continuous Power Rating as defined as 3dB greater than the AES rating.
3. Measured on axis at 1W, 1m, using typical horn, in 2Ā anechoic environment.

General Specifications

Power rating <sup>1</sup>	12Wrms
Continuous power rating <sup>2</sup>	24W
Nominal impedance	8
Frequency range	1,500-20,000Hz
Sensitivity <sup>3</sup>	106dB
Recommended min. crossover (12dB/oct)	2,200Hz
Voice coil diameter	25mm/1in
Voice coil material	Copper clad aluminium
Magnet type	Ferrite
Diaphragm material	PETP film
Surround material	PETP film

Mounting Information

Width	70mm/2.8in
Depth	50mm/2in
Weight	0.7kg/1.5lb
Fitting	Flange (2xM6 holes on 76mm /3in PCD)
Throat exit	25mm/1in

Packed Dimensions & Weight

Single pack size W x D x H	98mm x 98mm x 77mm / 3.8in x 3.8in x 3in
Single pack weight	1kg/2.2lb