

1PK-3003D Series


OAL:260mm

- 40-50% lower crimp force
- Decreases work-related injuries.
- Increases productivity.
- Superior mechanical gain.
- Interchangeable die sets for wide range of applications.

TAIWAN PATENT:118629

GERMANY PATENT:29619451.4

Material	Weight (g) (Frame only without die)	Weight (g)	Individual packing
S45C	638±10g	700±10	Blister Card

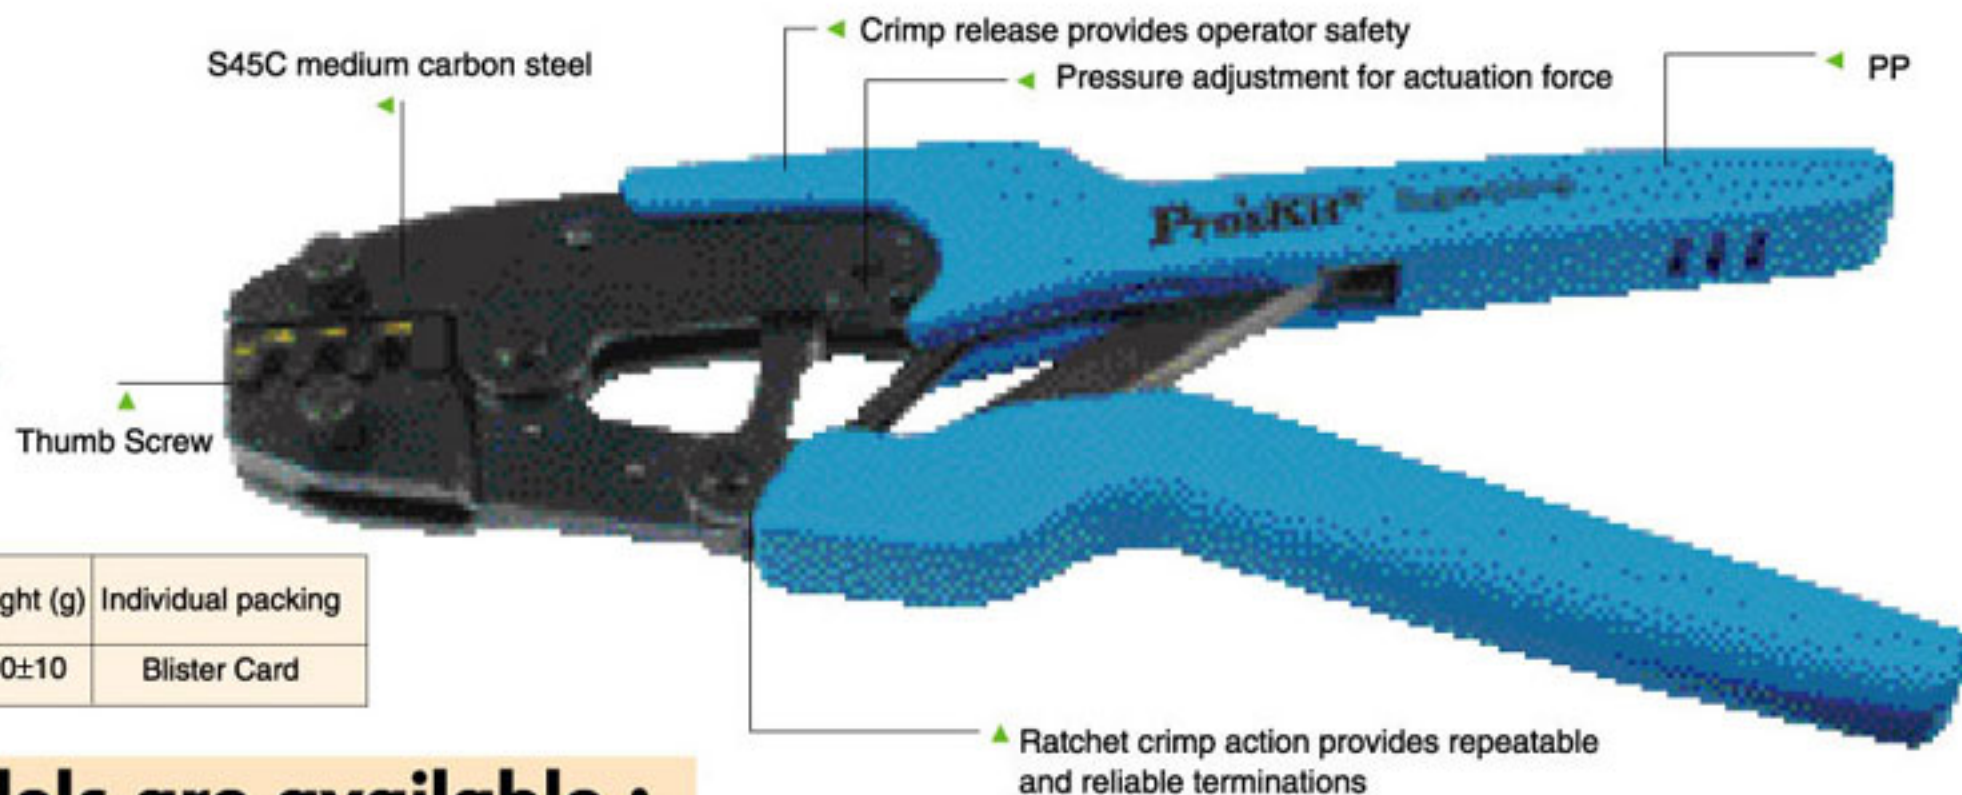

Following models are available :

	Completed set with die	Replacement die set	Description & application	Following models are available
	1PK-3003F		Supercrimp crimp tool frame (Frame only without die)	
	1PK-3003FD1	1PK-3003D1	22-10 AWG (0.325mm ² -5.261mm ²).	insulated terminals /color coded nests
	1PK-3003FD2	1PK-3003D2	22-12 AWG (0.325mm ² -3.31mm ²).	Non insulated Open Barrel Connectors, Commercial Type
	1PK-3003FD3	1PK-3003D3	Hex. 0.305, 0.068, 0.228	Cambridge CP-88, CP-89 BNC /TNC coax connectors with RG-58, RG-59/62 AU cables
	1PK-3003FD4	1PK-3003D4	Round 0.195	AMP Optimate Fiber-Optic SMA or SFR type connectors
	1PK-3003FD5	1PK-3003D5	Hex 0.213, 0.178, 0.068, 0.042	RG-58, RG-174 and RG-8218 for both 50 and 75 ohm cables
	1PK-3003FD6	1PK-3003D6	Hex, 0.429, 0.100, 0.080	N-Series and RG-8/11 Connectors
	1PK-3003FD7	1PK-3003D7	Hex 0.178, 0.128, 0.068	RG-174, Mini 59 BNC/TNC Connectors
	1PK-3003FD8	1PK-3003D8	Hex 0.324, 0.178, 0.068	RG-174, Belden-Type RG-8281 cables
	1PK-3003FD9	1PK-3003D9	Hex 0.213, 0.190, 0.068, 0.042	Plenum and Teflon Cables RG-58 and 59
	1PK-3003FD10	1PK-3003D10	Hex 0.350, 0.320, 0.255	RG-59, RG-6, RG-8281, F-type CATV Connectors
	1PK-3003FD11	1PK-3003D11	RJ-45, eight-position keyed or non-keyed modular plugs (excluding AMP)	
	1PK-3003FD12	1PK-3003D12	RJ-11 two, four and six-position modular plugs	

Individual packing :Blister Card

	Completed set with die	Replacement die set	Description & application	Following models are available
	1PK-3003FD13	1PK-3003D13	RJ-11 DEC MMJ six-position modular plugs with an offset release tab	
	1PK-3003FD14	1PK-3003D14	AMP RJ-45 eight-position modular plugs/Primary strain relief crimp bar is located further back on die/ modular plugs.	RG-58, RG-59/62, BNC/TNC Coax connectors
	1PK-3003FD15	1PK-3003D15	Hex, 0.255, 0.213, 0.068	
	1PK-3003FD16	1PK-3003D16	RJ-22 two and four-position handset modular plugs	
	1PK-3003FD17	1PK-3003D17	Usable for RJ-45, 10 position modular plugs	
	1PK-3003FD17-MA	1PK-3003D17-MA	Hirose RJ-48, 8 position modular plugs	
	1PK-3003FD18	1PK-3003D18	22-10 AWG (0.325mm ² -5.261mm ²)	Usable for cord end terminals
	1PK-3003FD19	1PK-3003D19	22-8 AWG 0.325mm ² -8.367mm ²	Usable for non insulated terminals 22-8 AWG
	1PK-3003FD20	1PK-3003D20	Hex, 0.151 (3.84mm) 0.178(4.52mm) 0.213(5.41mm)	Usable for Fiber-Optic SMA, SMB or SFR connectors
	1PK-3003FD21	1PK-3003D21	16-26AWG (0.128mm 2-1.31mm ²)	Usable for miniature insulated rings & splices
	1PK-3003FD22	1PK-3003D22	0.218(5.54mm) 0.049(1.24mm)	Usable for AMP RG-58 dual crimp BNC/ TNC coax connectors "O",