

Specification

Nominal Basket Diameter	10", 254mm
Nominal Impedance*	8 ohms
Power Rating**	
Watts	100W
Music Program	N/A
Resonance	76Hz
Usable Frequency Range***	80Hz-3kHz
Sensitivity	96.9
Magnet Weight	30 oz
Gap Height	0.312", 7.92mm
Voice Coil Diameter	2", 50.8mm

Thiele & Small Parameters

Resonant Frequency (fs)	76Hz
DC Resistance (Re)	6.9
Coil Inductance (Le)	0.66mH
Mechanical Q (Qms)	15.06
Electromagnetic Q (Qes)	0.53
Total Q (Qts)	0.51
Compliance Equivalent Volume (Vas)	41.1 ltr/1.5 cu. ft.
Peak Diaphragm Displacement Volume (Vd)	88cc
Mechanical Compliance of Suspension (Cms)	0.22mm/N
BL Product (BL)	11.3 T-M
Diaphragm Mass inc. Airlod (Mms)	21 grams
Efficiency Bandwidth Product (EBP)	143
Maximum Linear Excursion (Xmax)	2.4mm
Surface Area of Cone (Sd)	366.1cm ²
Maximum Mechanical Limit (Xlim)	

Mounting Information

Recommended Enclosure Volume	
Sealed	Acceptable
Vented	N/A
Overall Diameter	10.09", 256.2mm
Baffle Hole Diameter	9.05", 229.7mm
Front Sealing Gasket	Fitted as Standard
Rear Sealing Gasket	Fitted as Standard
Mounting Holes Diameter	0.25", 6.4mm
Mounting Holes B.C.D.	9.66", 245.4mm
Depth	3.8", 97mm
Net Weight	6.8 lbs 3.1 kg
Shipping Weight	8.5 lbs 3.9 kg

Materials of Construction

Coil Construction	Copper
Coil	Polyimide
Magnet Composition	Ferrite
Core Details	Vented
Basket Materials	Pressed Steel
Cone Composition	Paper
Cone Edge Composition	Paper
Dust Cap Composition	Solid Composition Paper




EMINENCE®
The Art and Science of Sound

DELTA DEMON™

A wicked 10" American guitar speaker with deep Delta Blues tone.

Coloration: Extremely balanced, dark, creamy smooth tone.

Genre: Jazz, Delta Blues, and Classical.

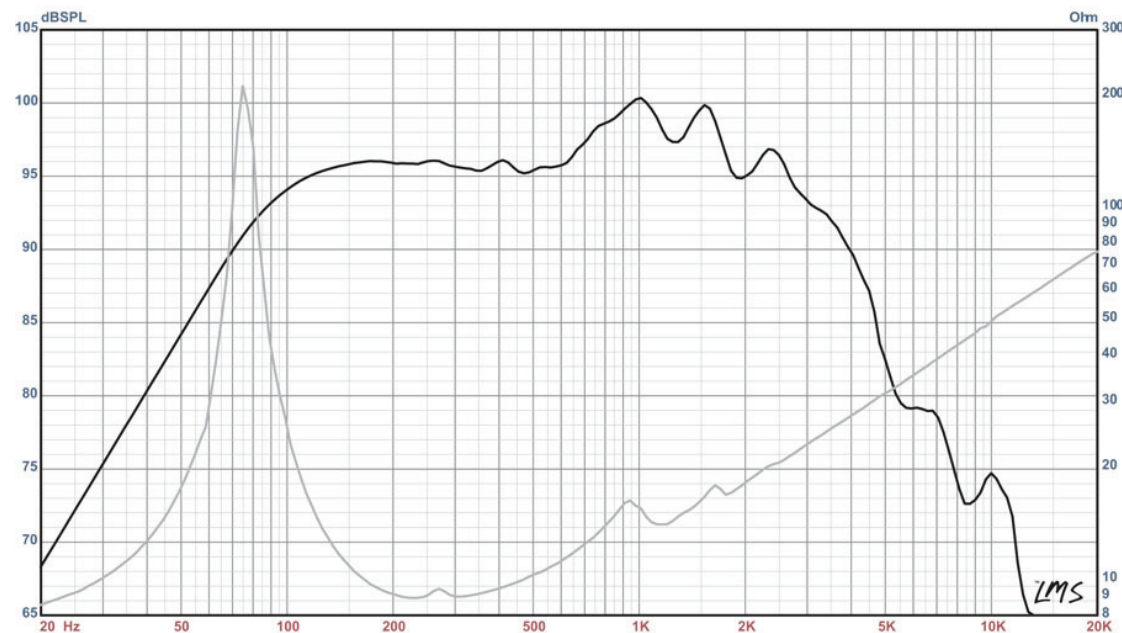

* Please inquire about alternative impedances.

** Multiple units exceed published rating evaluated under EIA 426A noise source and test standard while in a free-air, nontemperature-controlled environment.

*** The average output across the usable frequency range when applying 1W/1m into the nominal impedance. I.e: 2.83 V/8 ohms, 4 V/16 ohms.

Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2 ft. X 2 ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Hafler P1500 Trans-Nova amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges)