


FTR15-3070C



- Full gap flux saturation for increased BI and reduced distortion
- Glass loaded paper cone with weather-resistant impregnation
- Airflow vented magnet assembly for dynamic heat dispersion

8 Frequency Response

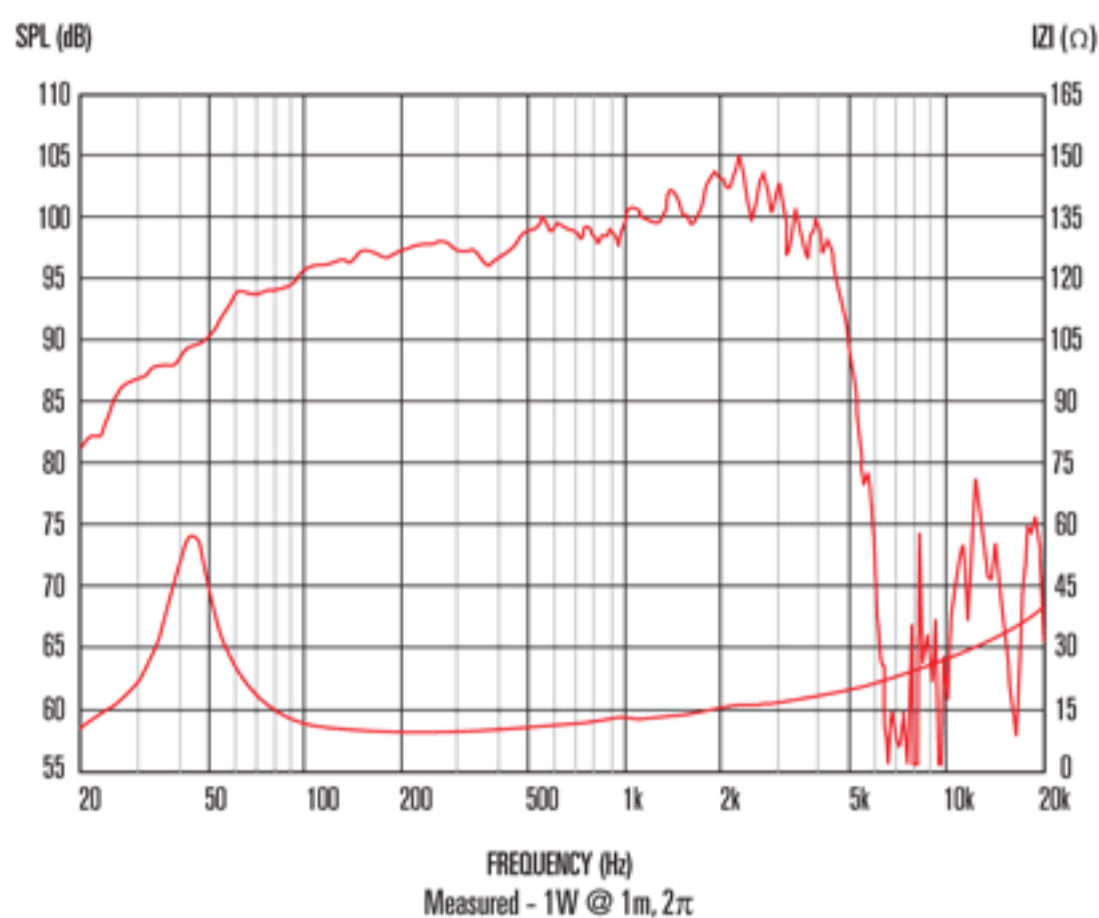

1. Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.
2. Continuous Power Rating is defined as 3dB greater than the AES rating.
3. Tested as per the EIA-426-A standard.
4. Measured on axis at 1W, 1m in 2^l anechoic environment.
5. Xmax derived from: (voice coil winding width-gap depth)/2.
6. Small signal parameters measured after unit subjected to pre-conditioning signal.

General Specifications

Nominal diameter	381mm/15in
Power rating ¹	400Wrms
Continuous power rating ²	800W
EIA power rating ³	500W
Nominal impedance	8
Sensitivity ⁴	99dB
Frequency range	40-4,000Hz
Voice coil diameter	75mm/3in
Chassis type	Cast Aluminium
Magnet type	Ferrite
Magnet weight	2.3kg/81oz
Coil material	Round copper
Former material	Glass fibre
Cone material	Glass loaded paper with weather-resistant impregnation
Surround material	Cloth-sealed
Suspension	Single
Xmax ⁵	3mm/0.12in
Gap depth	10mm/0.39in
Voice coil winding width	16mm/0.63in

Small Signal Parameters

D	0.33m/12.99in
Fs	41.4Hz
Mms	81.73g/2.88oz
Qms	3.510
Qes	0.429
Mmd	70.00g/2.47oz
Qts	0.382
Re	6.7
Vas	187.62lt/6.63ft ³
BI	18.3Tm
Cms	0.18mm/N
Rms	6.05kg/s
Le (at 1kHz)	0.59mH

Mounting Information

Overall diameter	385mm/15.16in
Overall depth	158mm/6.22in
Cut-out diameter	351mm/13.82in
Mounting slot dimensions	10mm x 7mm/0.39in x 0.27in
Number of mounting slots	8
Mounting PCD range	365-375mm/14.37-14.76in
Unit weight	6.3kg/13.8lb

Packed Dimensions & Weight

Single pack size W x D x H	435mm x 435mm x 200mm /17.1in x 17.1in x 7.9in
Single pack weight	7.7kg/17.0lb
Multi pack size W x D x H	1210mm x 1050mm x 980mm /47.6in x 41.3in x 35.4in
Multi pack weight	260kg/570lb