

808-080**Wire Stripping Tool**

OAL: 172mm



Cutting


Stripping



Material	Application
Body: Plastic steel & low carbon steel Blade: S55C	Stripping flexible cable from 0.2 ~4mm ²
Weight(g)	Individual Packing
150±5	Blister Card

CP-080E**Wire Stripping Tool**

OAL : 172mm

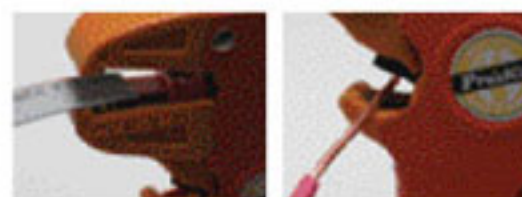

Cutting

Stripping

Economic Type



Material	Application
Body: ABS & low carbon steel	Stripping flexible cable from 0.2 ~4mm ²
Weight(g)	Individual Packing
196±5	Blister Card

608-369A/608-369B/608-369C**Wire Stripping Tool**

OAL: 170mm

**608-369A**
0.5, 1.2, 1.6, 2.0mm**608-369B**
1.0, 1.6, 2.0, 2.6, 3.2mm**608-369C**
22, 18-20, 14-16, 12, 10, 8 (AWG)

Model No.	Material	Hardness	Application Strip wire size	Weight(g)	Individual Packing
608-369A	Body: Zinc alloy Blade: SC41	Blade: HV450 ~800	0.5, 1.2, 1.6, 2.0mm	385±5	Blister Card
608-369B			1.0, 1.6, 2.0, 2.6, 3.2mm		
608-369C			22, 18-20, 14-16, 12, 10, 8 (AWG) For solid wire		

CP-369AE/BE/CE**Wire Stripping Tool**

OAL : 170mm

**CP-369AE**
0.5, 1.2, 1.6, 2.0mm**CP-369BE**
1.0, 1.6, 2.0, 2.6, 3.2mm**CP-369CE**
22, 18-20, 14-16, 12, 10, 8 (AWG)

Economic Type



Model No.	Material	Hardness	Application Strip wire size	Weight(g)	Individual Packing
CP-369AE	Body: Zinc alloy Blade: S45C	Blade: HV450 ~800	0.5, 1.2, 1.6, 2.0mm	353±5	Blister Card
CP-369BE			1.0, 1.6, 2.0, 2.6, 3.2mm		
CP-369CE			22, 18-20, 14-16, 12, 10, 8 (AWG) For solid wire		

8PK-371**Automatic Wire Stripper & Crimper**

OAL: 210mm

- Stripper Range: (0.2~6.0mm²) AWG 24-10
- The EASY STRIPPER cutters are made by precision machines for a long-life uses. 15N 88 ~90 (HRC55~60) blade cuts wire fast and smoothly.
- Plastic insulated handles keep your work safe.
- For insulated terminals 22-10 AWG (0.5-6.0mm²)
- For non-insulated terminals 22-10 AWG (0.5-6.0mm²)
- For Auto ignition terminals 7-8mm



Weight(g)	Individual Packing
295	Blister Card

8PK-371D**Automatic Wire Stripper & Crimper**

OAL: 210mm

- Alloy steel jaws Hardness: HV 550 ~650 (HRC52~57)
Can strip all types of wire from AWG 10-24 gauge (0.2~6.0mm²).
- Micro adjusting the swivel knob to strip electrical wire gauge smaller than AWG24 (0.2mm²)
- Adjustable stopper is swiveled if user does not use this function.
- For insulated terminals 22-10 AWG (0.5-6.0mm²)
- For non-insulated terminals 22-10 AWG (0.5-6.0mm²)
- For Auto ignition terminals 7-8mm



Weight(g)	Individual Packing
320	Blister Card