


# RM Series

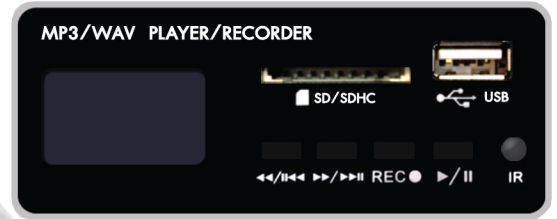

มีช่อง เสียบ USB MP3/WAV PLAYER/RECORDER

### FEATURES

- 7-band graphic equalizer
- 2 aux send/returns, 2 main channels/2 subgroup outputs
- 48V phantom power
- Support MP3, SD card

## SPECIFICATIONS

MODEL	RM802	RM1002	RM1202
SYSTEM	4 Mono 2 Stereo	6 Mono 2 Stereo	8 Mono 2 Stereo
MAXIMUM INPUT LEVEL	Mic : +22dBu, Other Line : +20dBu		
MAXIMUM OUTPUT LEVEL	Main XLR : +28dBu, Other Output : +22dBu		
METERS	3 Colour LED , Quasi Peak Response		
SENSITIVITY	0VU=+4dBu		
MASTER METER	12 Segment, -24dB to +16dB		
CHANNEL METER	Green Led, Signal		
FREQUENCY RESPONSE	+/- 1dB, 20Hz - 30KHz		
MIC CMRR at 1kHz	>80dB Typical		
THD+n at +14dBu at 1kHz	Mic to Mix Out <0.01%		
CROSSTALK [@1KHz]	Fader Shutoff : >80dB, Mute Shutoff :	>82dB	
NOISE, rms 20Hz to 20kHz	Mic Input E.I.N : -122dBu	Main Mix Fader Unity, Channel Fader Down :	<-95dBu [-97dB S/N]
		Main Mix Fader Unity, Channel Fader Unity :	<-82dBu [-86dB S/N]
CHANNEL PAD/LINE	-20dB [ MIC Input ]		
MONO/STEREO EQ	HIGH Shelving : +/-15dB, 12kHz	MID Peaking : +/-15dB, 2.5kHz	LOW Shelving : +/-15dB, 80Hz

All features & specifications subject to change without notice. © Natthapong Sales & Service Co.,Ltd.

September 2016  
สนใจสามารถสอบถามสินค้าจากตัวแทนจำหน่ายทั่วประเทศ

Distributor :

**บริษัท นัทพอง เซลล์แอนด์เซอร์วิส จำกัด**  
**Natthapong Sales & Service Co.,Ltd.**  
 www.mynpe.com : www.facebook.com/mynpethailand  
 E-Mail : mynpe@mynpe.com



สำนักงานใหญ่ : 119,119/1 ถนนอักษะงามค์ แขวงบูรพาภิรมย์ พระนคร กรุงเทพฯ 10200  
 โทรศัพท์ : 0-2225-0094, 0-2623-8899 (อัตโนมัติ 18 เลขหมาย) โทรสาร : 0-2226-4020  
 สาขาเขียร์รังสิต : ชั้น G (ด้านในสุด) 99 หมู่ 8 ถนนพหลโยธิน ต.ลาดหลุมแก้ว อ.ลำลูกกา จ.ปทุมธานี  
 12130 โทรศัพท์ : 0-2992-7379 (อัตโนมัติ 10 เลขหมาย) โทรสาร : 0-2992-7380



@mynpethailand