


BMB

BMB International Corp. Japan

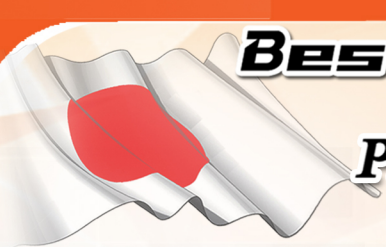

Best Music Brand

DESIGNED AND ENGINEERED IN JAPAN

Professional Hi-Fi Audio Power Amplifier



DAP-5000

DAP-8000



BACK

SPECIFICATIONS

MODEL	DAP-5000	DAP-8000
Max Output Power 1kHz THD = @1%	800W x 2CH (4Ω) : Stereo Mode 650W x 2CH (6Ω) : Stereo Mode 520W x 2CH (8Ω) : Stereo Mode 350W x 2CH (16Ω) : Stereo Mode 1000W x 1CH (4Ω) : Monaural Mode 640W x 1CH (8Ω) : Monaural Mode 1500W x 1CH (8Ω) : Bridge Mode	1100W x 2CH (4Ω) : Stereo Mode 950W x 2CH (6Ω) : Stereo Mode 800W x 2CH (8Ω) : Stereo Mode 500W x 2CH (16Ω) : Stereo Mode 1500W x 1CH (4Ω) : Monaural Mode 950W x 1CH (8Ω) : Monaural Mode 2000W x 1CH (8Ω) : Bridge Mode
Frequency Characteristic (20Hz ~ 20kHz, 8Ω)	±3dB	
THD (8Ω, 1kHz)	0.04%	
SN Ratio	98dB Over	
Damping Factor (100Hz 8Ω)	300 Over	
Voitage gain	38± 2dB	41± 2dB
Channel Separation (20Hz 1000Hz 8Ω)	48dB Over	
Input Impedance	20 kΩ (Balance) 10 kΩ (Unbalance)	
Audio Input Connectors	XLR Type RCA Phono Type	
Output Connectors	XLR Type (Through Out) Neutrik Speakon NL4MP (1+/1-) Screw Type (+/-)	
HPF Switch	50Hz/PASS	
Ground Switch	GND/FLOAT	
AC Input	220V ~ 240V (50/60Hz)	
Power Consumption (1/8 Output Pink noise 8Ω)	1800W	2800W
Cooling Fan	Automatic Airfic Controlled Fan	
Dimensions (mm)	483(W) x 89(H) x 414(D)	
Weight	15.0kg	19.0kg

All features & specifications subject to change without notice. © Natthapong Sales & Service Co.,Ltd.

Distributor :

บริษัท บัญพงษ์ เซลส์แอนด์เซอร์วิส จำกัด
Natthapong Sales & Service Co.,Ltd.

www.mynpe.com : www.facebook.com/mynpethailand
E-Mail : mynpe@mynpe.com



สำนักงานใหญ่ : 119,119/1 ถนนอักษะทางค์ วัชรบูรพาภิรมย์ พระนคร กรุงเทพฯ 10200
โทรศัพท์ : 0-2225-0094, 0-2623-8899 (อัตโนมัติ 18 เลขหมาย) โทรสาร : 0-2226-4020
สาขาเชียงราย : ชั้น G (ด้านในสุด) 99 หมู่ 8 ถนนพหลโยธิน ต.คูคต อ.ลำลูกกา จ.ปทุมธานี 12130
โทรศัพท์ : 0-2992-7379 (อัตโนมัติ 10 เลขหมาย) โทรสาร : 0-2992-7380

October 2015

สนใจสามารถสอบถามสินค้าจากตัวแทนจำหน่ายทั่วประเทศ



@mynpethailand